




# AOPEN

Bright Ideas Connected

# dTILE

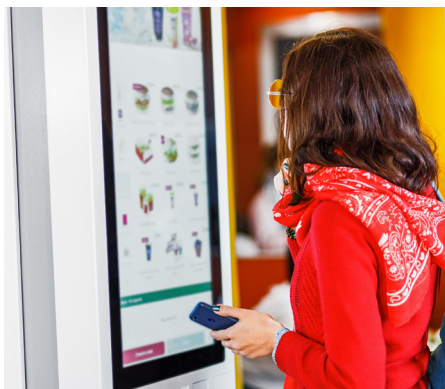


## 22" open frame for industrial kiosks dTILE 22-O

The AOPEN dTILE 22-O open frame touch display provides an industrial grade solution designed for Kiosk Enclosure and System Integration, a reliable product for vertical applications. The dTILE 22-O features an IPC-class touch interactive design. With its flat, zero bezel, dust and water resistance, the device is tamper-proof. The dTILE 22-O offers the versatility required for Self-Service Kiosks and Industrial Automation Kiosk and Retail Commercial AD Kiosk. Its VESA mounting or 4-Sides mounting kit as an optional accessory for variety installation needs.

The dTILE 22-O features:

- + AMTouch module for customisation
- + Programmable Virtual Key design for PenMount utility
- + Compact and fanless design
- + High performance and low power system
- + FHD screen

# dTILE 22-O

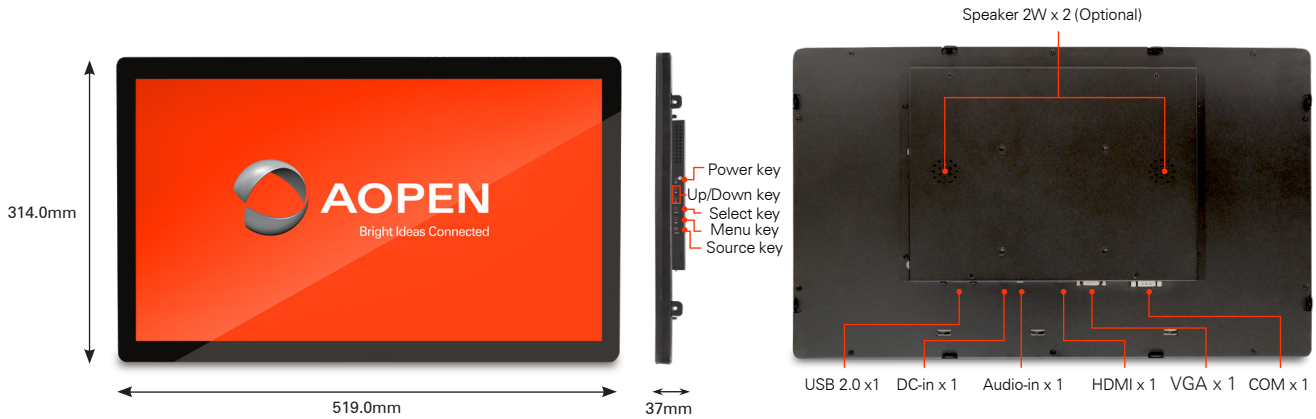

Model name		dTILE 22-O
Panel	Display Size	21.5"
	Display Area	H x V (mm) 476.64 x 268.11
	Aspect Ratio	16 : 9
	Resolutions	1920 x 1080 FHD
	Pixel Pitch (mm)	248.45 x 248.45
	Brightness (cd/m2)	250
	Colour	16.7M
	Viewing Angle	89/ 89/ 89/ 89
	Contrast Ratio	3000
Touch	Touch Technology	PCT
	Touch Points	5
	Glass Hardness	Mosh 5
Speaker	Speaker Type	Optional 2W x 2
Rear I/O	Video Inputs	HDMI x 1 VGA x 1
	Audio Input	Audio in x 1
	Others	RS-232 x 1, USB 2.0 x 1, DC-in x 1, IR(OSD)-in x1
Mechanical	Unit Size (W x H x D mm)	519.0 x 314.0 x 37.0
	VESA Holes (mm)	100 x 100
	Net Weight (kg)	5.04
	Gross Weight (kg)	8.36
	Package Size (mm)	606 x 468 x 164
Power	Power consumption (W)	20W
	Input Voltage	12~19 V
Environmental	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Operating Humidity	90% RH (40°C non-Condensing)
Accessories	Included	19V 65W Adapter, HDMI cable, USB cable, VGA cable
	Optional	IR remote kit, VESA Wall Mount bracket, 4sides Mount bracket
Warranty		3 years

