



# AOPEN

Bright Ideas Connected

# dTILE




## 22" open frame commercial grade dTILE 21-H

The dTILE 21-H is a commercial grade Open Frame touch display. With a Mosh 5 glass hardness, this commercial display withstands tampering in commercial environments. The 21-H is easily built into any situation and is therefore most suitable for smart kiosk and smart vending solutions. The high-brightness 700 nits panel makes it very suitable for outdoor applications as well.

The dTILE 21-H features:

- + Open Frame Model
- + 21.5", 1920 x 1080px, VA panel
- + IP65 dust- and waterproof grade
- + VESA Mounting Holes 100 x 100 mm and 75 x 75 mm
- + Mosh 5 glass hardness

# dTILE 21-H

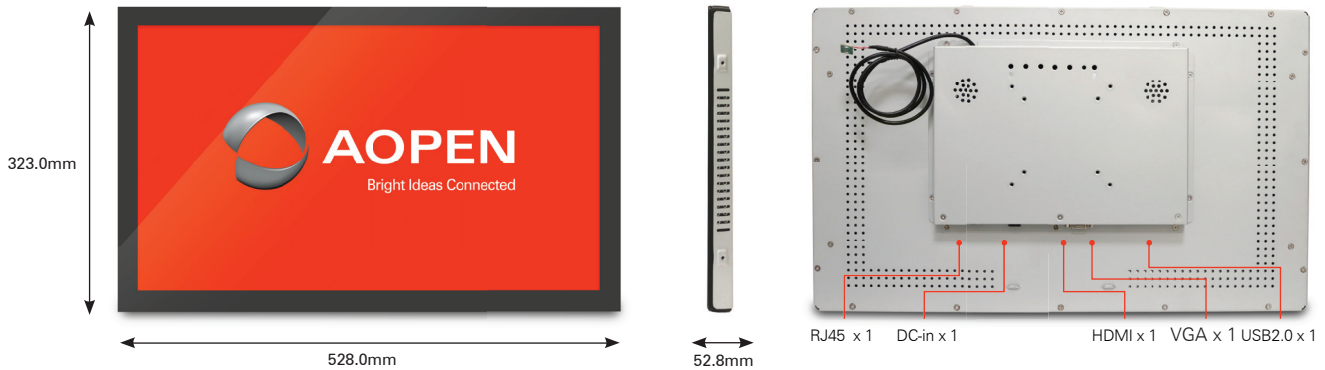

Model name		dTILE 21-H
Housing Material		Metal
Dimensions	Unit Size (W x H x D)	528 x 323 x 52.8 mm
	Display Area (H x V)	476 x 268 mm
	Packaging Size	600 x 395 x 148 mm
	Mounting Size	VESA 100 x 100mm, VESA 75 x 75mm
Weight	Net Weight	6.34 kgs
	Gross Weight	8.46 kgs
Front Panel	Resolution	21.5" 1920 x 1080 (16:9)
	Max Brightness	700 NITS
	Panel Type	VA
	Viewing Angle	178 / 178
	Response Time	15ms
	Contrast Ratio	1000:1
	Touch	PCT supports 10 points
	Colour	16.7M
	Glass Hardness	Mosh 5
Side Panel I/O	Power Button	x 1
	Brightness Up	-
	Brightness Down	-
	Other	-
System I/O	DC Jack	x 1 (12 ~ 19V)
	Graphic Port	x1 (HDMI)
	USB 2.0 Port	x 1
	USB 3.0 Port	-
	RJ45	x 1
	COM Port	-
	Audio in	-
Adapter		95W / 19V
Input Voltage		AC 12 ~ 19V
Warranty		2 Years
Environment	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Relative Humidity	90% RH (40°C non-Condensing)



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.