



# AOPEN

Bright Ideas Connected

## eTILE



## Slim and Robust Commercial all-in-one eTILE 15M-FP2


The AOPEN eTILE 15M-FP2 is a slim and commercial all-in-one interactive touch display for kiosk applications. It combines the AiCU a Smart Device Management Service -its Cloud service through out-of-band control- and a Celeron Intel SoC platform. The all-in-one touch display has a protective bezel to avoid screen cracks, an IK compliance with a metal chassis and a hidden keypad. IP65 compliance dust- and waterproof front panel and Full HD panel can be fully utilized in your kiosk applications.

The eTILE 15M-FP2 features:

- + Fanless design
- + HEVC/H.265 and VP9 high-definition video playback
- + Hidden keypad and extended power switch
- + Metal chassis for embedded structure with IK07 and IP65 grade front panel, an IPX2 rear panel and 7H hardness
- + Protective bezel design to avoid a cracked screen



# eTILE 15M-FP2

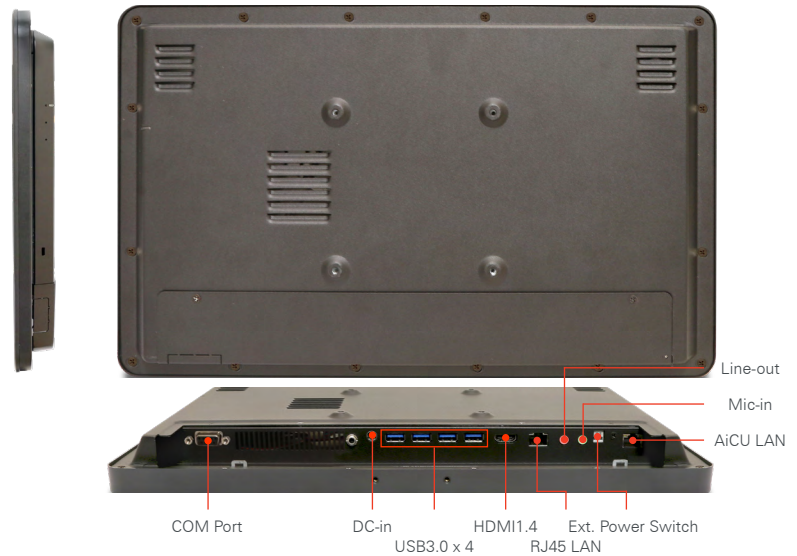

Model name		eTILE 15M-FP2
Housing Material		IP Metal Design
Dimension	W x H x D (mm)	397.1 x 246.6 x 36.15 mm
	W x H x D (inch)	15.63 x 9.71 x 1.42 inch
Weight		3.2 kg / 1.63 lbs
CPU		Intel® Celeron® Processor J3455 (Quad Core)
Chipset		CPU built-in
Memory	Channel	Dual Channel
	Type	DDR3L SO-DIMM x 2
	Data Rate	1866 MHz
	Memory	2GB x 2 (default)
Graphics		Intel® HD Graphics 500 / 505
Front Panel	Resolution	15.6" 1920 x 1080 (16:9)
	Max Brightness	250 NITS
	Panel Type	Vertical Alignment
	Viewing Angle	178 / 178
	Response Time	25ms
	Contrast Ratio	3000:1
	Touch	PCT supports 10 points
Expansion slot		M.2 2280 x 1 (SSD), M.2 2242 x 1 (AiCU / LTE / SSD), M.2 2230 x 1 (WiFi)
Audio	Type	Realtek HD Audio Codec ALC269
	Channel	2 Channel
LAN		Realtek RTL8111G 10 / 100 / 1000 Mbps
Storage Supports:		M.2 2280 (Default 64GB)



Security	Hidden Keypad, Secure Cable Cover		
Storage Bay	-		
Front Camera	-		
Side Panel I/O	Power Button	x 1	
	Brightness Up	x 1	
	Brightness Down	x 1	
	HDD indicator	x 1	
System Panel I/O	DC Jack	x 1 (12 ~ 19V)	
	HDMI Out Port	x 1	
	USB 2.0 Port	-	
	USB 3.0 Port	x 4	
	COM Port	x 1 (RJ50)	
	Audio Set	Line-Out	x 1
		Mic-in	x 1
	AiCU Remote LAN	x 1	
	RJ45 LAN	x 1	
	Others	Embedded WiFi Antenna x 2, Extended Power Switch x 1	
Watchdog Timer	1 ~ 255 SEC./min		
IP/IK Grade	IP65 / IK07 (Front), IPX2 (Side)		
Adapter	90W (19V, 4.74A) AC Adapter		
Input Voltage	AC 100 ~ 240V		
Warranty	2 Years		
TPM	2.0		
Environment			
MTBF	50,000 hrs		
Operating Temperature	0 ~ 40°C (32 ~ 104°F)		
Storage Temperature	-20 ~ 60 °C (-4 ~ 140°F)		
Relative Humidity	90% RH (40°C Non-Condensing)		



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.