



# AOPEN

Bright Ideas Connected

## eTILE-X



## 10" Android Room Booking System eTILE-X1032TB




The ultra-thin design is easy to install and use in the effective management of meeting rooms or room booking. The built-in RFID and NFC functions can identify authorized users, or scan through Webcam to assist in identification. All-Around multi-color LEDs can display a timely use status of the meeting room or room booking, and the simple and clear information transmission. The Quad-core Android system can be connected to Enterprise Intranetworking software system management or through the PoE to connect meeting scheduling information on Customer Cloud Service. The front IP65 and backup cover heat dissipation chassis to ensure the quality and safety of public area applications.

The eTILE features:

- + Webcam and RFID / NFC capabilities
- + All-round LED lighting
- + Powered by PoE
- + Increase room availability
- + Display the room's status and usage reports
- + Instant booking with your access card
- + Manage and monitor in the Cloud
- + Slim and Light design



# eTILE-X1032TB

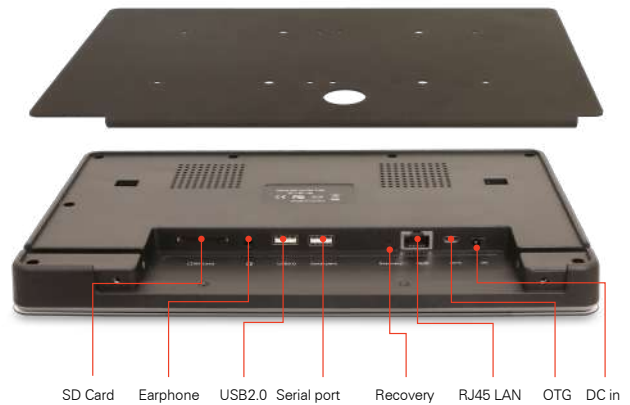

<b>Model name</b>		<b>eTILE-X1032TB</b>
<b>Housing Material</b>		Plastic with Metal Cover
<b>Dimension</b>	<b>W x H x D (mm)</b>	275.4 x 170.4 x 25 mm
	<b>W x H x D (inch)</b>	10.84 x 6.71 x 0.98 inch
<b>Weight</b>		0.74 kg / 1.63 lb
<b>CPU</b>		Rockchip RK3288 Quad Core Cortex-A17 1.6 GHz
<b>Chipset</b>		CPU built-in
<b>Memory</b>	<b>Channel</b>	Single Channel
	<b>Type</b>	DDR3L
	<b>Data Rate</b>	1333 MHz
	<b>Memory</b>	2GB (onboard)
<b>Graphics</b>		ARM Mali-T764 (integrated)
<b>Front Panel</b>	<b>Resolution</b>	10.1" 1280 x 800 (16:10)
	<b>Max Brightness</b>	250 NITS
	<b>Panel Type</b>	VA
	<b>Viewing Angle</b>	170 / 170
	<b>Response Time</b>	25ms
	<b>Contrast Ratio</b>	800
	<b>Touch</b>	PCT supports 10 points
<b>Expansion slot</b>		-
<b>Audio</b>	<b>Type</b>	Everest ES8316
	<b>Channel</b>	Stereo
<b>LAN</b>		Realtek RTL8211E 100/1000 Mbps
<b>Storage</b>		-

Supports:



Android 8.1

<b>Security</b>		-	
<b>Storage Bay</b>		16GB SSD (onboard)	
<b>Front Camera</b>		x 1 (2MP)	
<b>Side Panel I/O</b>	<b>Power Button</b>	-	
	<b>Brightness Up</b>	-	
	<b>Brightness Down</b>	-	
	<b>HDD indicator</b>	-	
<b>System Panel I/O</b>	<b>DC Jack</b>	x 1 (12V)	
	<b>HDMI Out Port</b>	-	
	<b>USB</b>	USB Host	
	<b>Micro USB</b>	Micro USB OTG	
	<b>USB</b>	USB for serial	
	<b>Audio Set</b>	<b>Line-Out</b>	-
		<b>Mic-in</b>	x 1
	<b>RJ45 LAN</b>	x 1	
	<b>Others</b>	RFID x 1 NFC x 1 Bluetooth 4.0 x 1	
	<b>Watchdog Timer</b>		-
<b>IP/IK Grade</b>		IP65, IK07 (front panel)	
<b>Adapter</b>		12V / 2A adapter	
<b>Input Voltage</b>		AC 100 ~ 240V	
<b>Warranty</b>		1 Year	
<b>TPM</b>		N/A	

## Environment

<b>MTBF</b>	45,000 hrs
<b>Operating Temperature</b>	0 ~ 40 °C (32 ~ 104°F)
<b>Storage Temperature</b>	-10 ~ 50 °C (14 ~ 122°F)
<b>Relative Humidity</b>	95% RH 50°C (Non-Condensing)



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.