




Digital Signage Series

Tailored for your business

DV Displays

Panel Features

On these 1920 x 1080 px @60Hz resolution displays, the LED backlight adds an extra dimension to the viewing experience. Due to the 500 NITS brightness, these displays function just fine in bright environments.

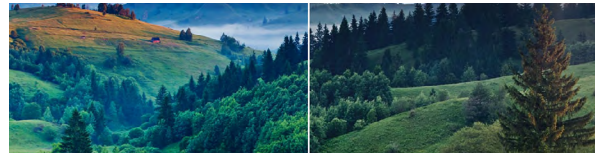

Mounting options

The DV screens display content in portrait and landscape mode. Mounting them on the wall is easy due to VESA standard measurements.



24/7 Operability

The longevity on the LED lamps save energy and guarantee constant operation. The RS232 and IR-in port also offer the possibility to remote operate the displays.



DV Displays


DV325



DV435



DV555

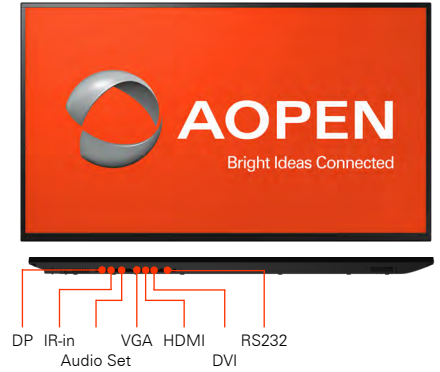

Model name		DV325	DV435	DV555
Dimensions	Unit Size (W x H x D)	725.8 x 420.3 x 57.9 mm	971.6 x 567.5 x 53 mm	1242.41 x 721.95 x 53 mm
	Display Area (H x V)	698 x 393 mm	941 x 529 mm	1210 x 680 mm
	Mounting Size	200 x 100 mm	200 x 200 mm	200 x 300 mm
Weight		8.8 kgs	10 kgs	17 kgs
Panel	Resolution	31.5", 1920 x 1080 @60Hz	43", 1920 x 1080 @60Hz	55", 1920 x 1080 @60Hz
	Max Brightness	500 NITS	500 NITS	500 NITS
	Panel Type	MVA	MVA	MVA
	Viewing Angle	178 / 178	178 / 178	178 / 178
	Response Time	8ms	8ms	8ms
	Contrast Ratio	4000 : 1	4000 : 1	4000 : 1
	Glare	Anti-glare, 3H hardness (Haze 2%)	Anti-glare, 3H hardness (Haze 2%)	Anti-glare, 3H hardness (Haze 2%)
	Colour	16.7M	16.7M	16.7M
	Bits	8-bit	8-bit	8-bit
Backlight life time	50,000 hrs	50,000 hrs	50,000 hrs	
Signal	Input Signal	VGA x 1, HDMI x 1, DP x 1, DVI x 1, Audio-in	VGA x 1, HDMI x 1, DP x 1, DVI x 1, Audio-in	VGA x 1, HDMI x 1, DP x 1, DVI x 1, Audio-in
	Output Signal	Audio-out	Audio-out	Audio-out
Control		RS232 x 1, IR in x 1	RS232 x 1, IR in x 1	RS232 x 1, IR in x 1
Audio Speakers		2 x 10W	2 x 10W	2 x 10W
OS Slot		Line-Out x 1, Mic-in x 1, Speaker x 1 (2 x 10W)	Line-Out x 1, Mic-in x 1, Speaker x 1 (2 x 10W)	Line-Out x 1, Mic-in x 1, Speaker x 1 (2 x 10W)
Power Supply		AC 100 ~ 240V ± 10% (50 / 60Hz)	AC 100 ~ 240V ± 10% (50 / 60Hz)	AC 100 ~ 240V ± 10% (50 / 60Hz)
Warranty		2 Years	2 Years	2 Years
Environment				
Operating Temperature		0 ~ 40°C (32 ~ 104°F)	0 ~ 40°C (32 ~ 104°F)	0 ~ 40°C (32 ~ 104°F)
Power Consumption		<0.3W (off), <0.5W (sleep), 60W (on)	<0.3W (off), <0.5W (sleep), 60W (on)	<0.3W (off), <0.5W (sleep), 60W (on)



The specifications depicted may be subject to change without prior notice. All trademarks are copyright of their respective owners. © AOPEN Inc.