


Open Frame



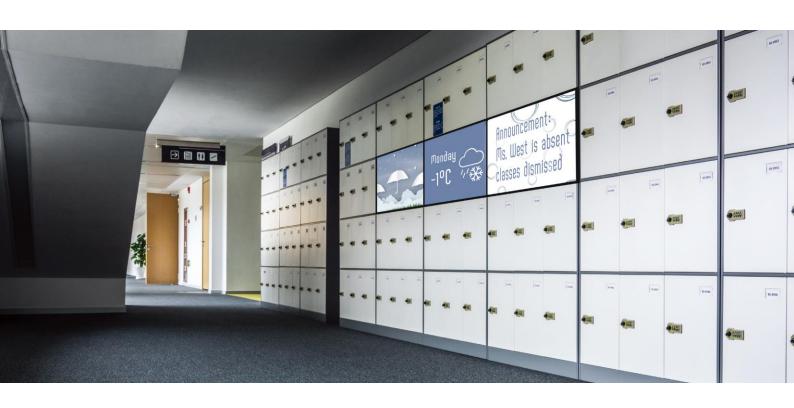

31.5" Open Frame Display Commercial Grade **DT3239D**

The features:

- 31.5", 1920 x 1080 resolutions
- 400nits, PCAP multi-touch panel
- IP65 dust- and waterproof grade in front panel
- Anti-fingerprint coating glass panel
- Tempered safety glass
- IK08 Impact Protection*
- Quality panel for landscape, portrait mode
- VESA mounting holes 400 x 200mm

*IKO8 rated products are protected against 5 joules of impact. This is the equivalent of a 1.7kg mass being dropped from 300mm above the protect.

Self-Service Kiosk



Industrial Monitor



Smart Locker



EMC and DoC








DT3239D


Unit: mm

Dimensions

Front View

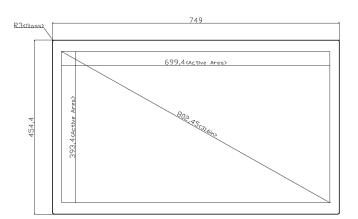

Rear View

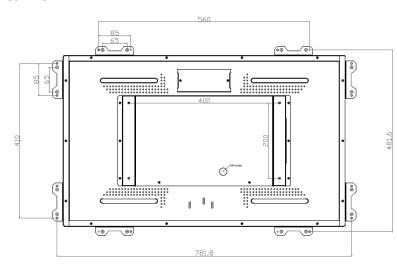



Specifications

DT3239D				
Chassis	Mechanical Design	Metal with implanted IP design		
	Dimension (W x H x D)	749 x 455 x 58 mm		
Thermal Solution		Fanless technology		
Panel	Resolution	31.5", 16:9, 1920 x 1080, 60Hz		
	Туре	VA		
	Maximum Brightness	400cd/m2		
	Response Time	6ms		
	Contrast Ratio	1400:1		
	View Angle (Horizontal)	89/89		
	View Angle (Vertical)	89/89		
	Backlight	LED backlight		
Touch	Touch Glass	Projected capacitive touch, 27 inch, 3.0mm chemically strengthened glass, 7H		
	Touch Controller	10 points touch		
Temper ature	Operation	0°C ~ 50°C (32°F~ 122°F)		
	Storage	-20°C ~ 60°C (-4°F~ 140°F)		
OS of Driver Software Support		Windows, Linux and Android		

IP Level		
IP Level		IP65 (front)
I/O Interface On Rear Site		HDMI type A, USB for touch (5V input from USB host), VGA DB-15 female, RJ45 for OSD remoter, AC-in for AC power
Net Weight		13.3 Kg
Mounting	Rear	400x200mm VESA mount
	Side	Mounting brackets on all four sides
Input Voltage		AC input 100~240 VAC, 50/60Hz
Warranty		3 years
Environment		
MTBF		50,000hrs demonstrated
Relative Humidity		90% RH (40°C non-condensing)
Certification		FCC / CE(Class B) / RoHS / CB
Packing		
Dimension (Packing)		865 x 565 x 166 mm
Gross Weight		18.62 Kg
Accessory In Box		HDMI cable, USB cable, OSD remote, AC cable, Side mount bracket x8, M4 screws x16

^{*}Please note that product specifications are subject to change without notice



AOPEN Headquarter New Taipei City, Taiwan AOPEN America San Jose, USA **AOPEN Europe** Rosmalen, Netherland **AOPEN Australia** Melbourne, Australia AOPEN Japan Tokyo, Japan AOPEN China Shanghai, China