



Commercial Chrome All-in-One 15.6" | Fanless | IP65 | Glove Touch **cTILE 15 Gen2**




The **AOPEN Commercial Chrome All-in-One Solution cTILE 15 Gen2** is a powerful, enterprise-grade device built for continuous operation. Featuring a 15.6-inch touchscreen with glove-touch support, it is ideal for business environments. It also supports Google Chrome Enterprise and Chrome Education upgrades, making it perfect for non-consumer Chrome device settings.

Features:

- Ruggedized design
- Front panel IP65 dust and water resistant
- 15.6" at 1920x1080 px (16:9)
- 250 nits, VA panel
- VESA compatible mount (100 x 100)
- Tamper proof, fanless, and solid-state design
- Glove touch support – Nitrile / Latex
- Supports Chrome Device Management



cTILE 15 Gen2

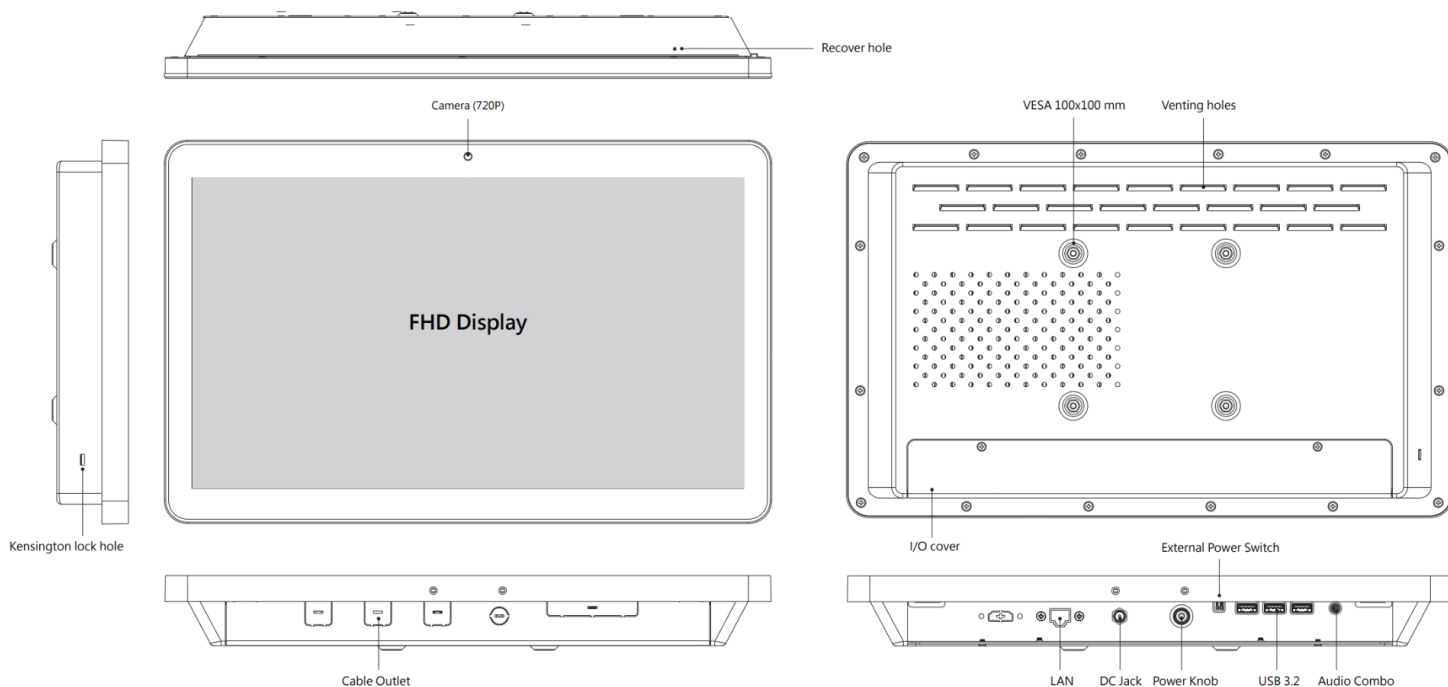

Model name		cTILE 15 Gen2
Housing Material		Metal/Plastic
Dimensions	W x H x D (mm)	397 x 247 x 49 mm
	W x H x D (inch)	15.63 x 9.24 x 1.93 inch
Weight	Net Weight	3.84 kg / 8.47 lb
	Gross Weight	5.5 kg / 12.13 lb
System	CPU	Intel® Celeron
	Memory	8GB
	Graphics	Intel HD graphic, integrated on CPU
	Audio	Audio combo jack x1
	WLAN	WIFI 6E 802.11 b/g/n/ac/ax + BT5.2, dual band
	Storage	EMMC 32G
Front Panel	Resolution	15.6" 1920 x 1080 (16:9)
	Maximum Brightness	250 nits
	Panel Type	VA
	Viewing angle	178°/178°
	Response time	22ms
	Contrast Ratio	1000:1
	Touch	10 points PCT touch
	Camera	720P
	IP Grade	Front IP65 / Rear IPX2

I/O	Power Button (Hidden)	x 1
	DC Jack	x 1
	HDMI Out Port	-
	USB 3.2 Port	x 3
	RJ45	x 1 (Ethernet 1000/100/10)
	Audio Set	Line-Out Mic-in Audio Combo Jack x 1
Others	Others	Kingston lock (slot) x 1 External Power Switch x 1 Recovery hole x 1
	Adapter	90W
	Input Voltage	DC19V
	Security	Google TPM, Kensington lock
Others	Warranty	1 year
	Optional	Slim type VESA mount, T<11mm Glove touch support (Nitrile / Latex) Open frame bracket kit
	Environment	
MTBF	50000 hours	
Operating Temperature	0 ~ 40°C (32 ~ 104°F)	
Storage Temperature	-20 ~ 60°C (-4 ~ 140°F)	
Relative Humidity	90% RH max	

Supports:

